


FDTV2 Series TV BAND PASS FILTER



- DVB, ATSC AND ISDB CRITICAL AND NON CRITICAL MASK
- LOW INSERTION LOSS
- OUTPUT MONITOR PROBE
- HIGH TEMPERATURE RANGE

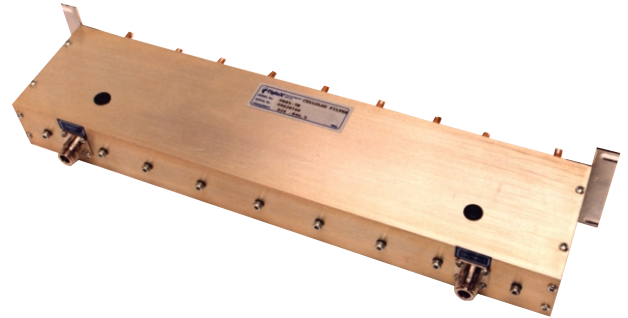

SPECIFICATION	VALUE		
Type	Elliptical		
Frequency Band	470 – 862 MHz		
Frequency Sub-Bands	470 – 566	566 – 698	698 – 862
Channel Bandwidth	6 – 8 MHz		
ISDB Mask	Critical and Non Critical Mask		
DVB Mask	Critical and Non Critical Mask		
ATSC Mask	Critical and Non Critical Mask		
Insertion Loss	1.5 dB typ @ Fo		
Return Loss All Ports	20 dB		
Power Input	300 W max		
Connectors	N (f), DIN 7/16 (f)		
Temperature Range	-20 a +60 °C		
Coupling Output Monitor Probe, Optional	-30 dB		
Mounting, Optional	19" Rack		

	DVB NON CRITICAL MASK, 8MHz Bw	DVB CRITICAL MASK, 8MHz Bw	ATSC SIMPLE MASK
Selectivity Mask Specifications	> 5db at Fo +/- 4.2MHz > 16db at Fo +/- 6MHz > 41db at Fo +/- 12MHz	> 15db at Fo +/- 4.2MHz > 26db at Fo +/- 6MHz > 51db at Fo +/- 12MHz	> 10db at Fo +/- 3.5MHz > 24db at Fo +/- 6MHz > 36db at Fo +/- 9MHz

Factory reserves the right to change specifications without prior notice.

DOC BR103.01 • 31102012

7331 NW 54th Street • Miami FL 33166 • USA
Ph (305) 884-8991 • Fax (305) 884-4041
E mail: info@fiplex.com

Web Site: www.fiplex.com

S.Cabral 1242 • Córdoba (5006) • Argentina
Ph (54-351) 456-8263 • Fax (54-351) 456-2507
E mail: info@fiplex.com